



# HotFind-S

Mid-Level

Professional Thermal Imaging Camera



### Digital Noise Reduction

HotFind-S adopts brand-new image processing technology to decrease interference to generate sharper and clearer images.

### High-speed Image Processing Engine

The newly developed high-speed image processing engine utilises dynamic processing to provide an image output frame-rate of up to 50Hz without any delay.



Ergonomic Design



Shock Resistance



USB



Multi-sockets



Micro SD card



IP54



Abnormal Temperature Alarm



DUO-VISION PLUS



5 hours Continuous Operation



Sun Shield



Multi-lenses optional




Easy to Operate



### DUO-VISION PLUS Technology

The HotFind-S uses our unique DUO-VISION PLUS technology to fuse infrared and visual images to deliver high quality thermal images with details, such as text, making it even easier for user experience.

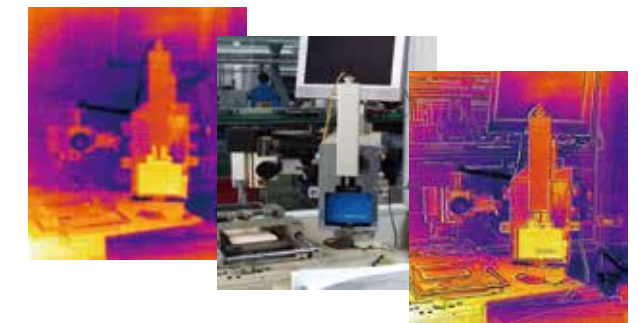


### IR Video Recording

Users can use the IR video recording function to record dynamic changes during the survey for review and further analysis.



### Real-time Analysis on Computer

The HotFind-S can be connected to a computer to process temperature data in real-time and carry out data analysis, while generating a thermal image detection report.

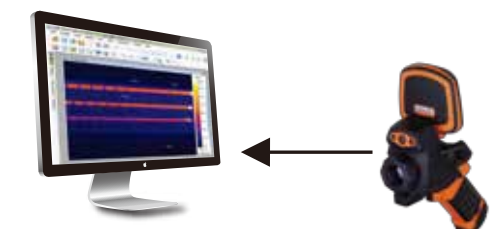

Professional Thermal Imaging Camera

# HotFind-S



### 3.5" Tilting LCD Touch Screen

HotFind-S is equipped with a 3.5inch LCD touch screen. The user can adjust the angle of the LCD for the best viewing angle. The tilting design also provides protection for the LCD while the camera is not in use.

### Dual Control--Touch Control and Keyboard Control

Two kinds of control mode, touchscreen and push button keypad, fulfill the usage habits of different users.



### Drop Resistant

Full wrapping design with shock resistant and drop resistant cover to provide the best protection for the lens, screen and precision electronic components.



### Long Battery Life

The HotFind-S uses high capacity lithium batteries, and with its power saving design, it can work for up to 5 hours continuously.



Model	HotFind-S
<b>Image Performance</b>	
FOV/Min. Focus Distance	29° x22°/0.15m
Spatial Resolution	1.1mrad
Thermal Sensitivity	≤0.05°C@30°C
Detector Type	UFPA
Resolution	384x288
Spectral Range	7.5-14um
Focus	Manual
<b>Image Presentation</b>	
Image Mode	IR/CCD/Duo-vision/Duo-vision Plus
LCD Display	3.5" Capacitive touch screen
Visible Pixels	High definition CCD , 5million pixels
Video Output	NTSC (60Hz) or PAL (50Hz) composite video
<b>Temperature Measurement</b>	
Measurement Range	-20°C ~ +650°C (Up to 1500°C, Optional)
Accuracy	±2° or ±2% of readings
Measurement Mode	8 movable spots, auto hot/cold spot, 2 lines, 5 area boxes, isotherm
Correction	Ambient temperature/Emissivity / Humidity / Distance
Pseudo-color	Iron, Iron inverted, Rainbow,Feather, Grey and Grey inverted.
Alarm	Yes
<b>Image Storage</b>	
Type	16GB TF card
Image Format	.JPG(thermal/Visual)
Annotation	Voice annotation, text annotation
<b>Power System</b>	
Battery Type	Rechargeable lithium battery
Working Voltage	DC 4V-4.8V
Battery Operating time	5 hours
<b>Environment Specification</b>	
Operating Temperature Range	-20°C to +50°C
Storage Temperature Range	-40°C to +70°C
Humidity	10% to 95%, non-condensing
Encapsulation	IP54
Shock/Vibration	30g 11ms(IEC60068-2-27)10Hz~150Hz~10Hz 0.15mm(IEC60086-2-6)
Drop Resistance	1.8 meter
Digital Zoom	1x to 10x
<b>Physical Characteristic</b>	
Size	215 mm ×80mm ×219mm
Weight	Less than 800g
Tripod Mounting	1/4" _20
<b>Additional Features</b>	
Illuminator	Yes
Laser Pointer	Yes
Video Record	Yes
Ports	USB port , Analog video output
Bluetooth	Yes
Available Optional Lenses	7°, 12°, 48°