


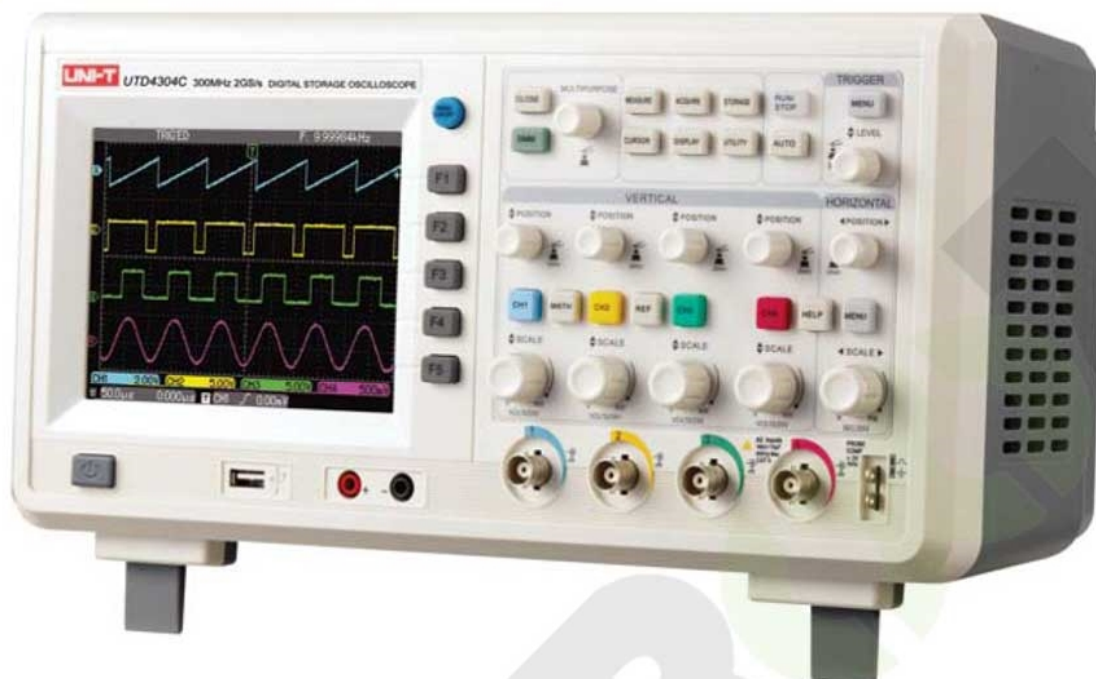

SPECIFICATIONS

Specifications	UTD4104C	UTD4204C	UTD4304C
Channels		4	
Bandwidth	100MHz	200MHz	300MHz
Sample Rate		2GS/s	
Rise Time	≤3.5ns	≤1.8ns	≤1.2ns
Memory Depth		24kpts	
Vertical Sensitivity		2mV/div~5V/div	
Time-Based Range	5ns/div~50s/div	2ns/div~50s/div	1ns/div~50s/div
Storage		Setup, Wave, Bitmap, CSV	
Trigger Modes		Edge, Pluse, Video, Slope, Alternate	
Interfaces		USB Device, USB Host, Multimeter Interface	
Multimeter Specifications	Range	Best Accuracy	
DC Voltage(V)	400mV, 4V, 40V, 400V	±(1%+5)	
AC Voltage(V)	4V, 40V, 400V	±(1.2%+5)	
DC Current(A)	4mA, 40mA, 400mA, 4A	±(1%+5)	
Resistance(Ω)	400Ω, 4kΩ, 400kΩ, 4MΩ, 40MΩ	±(1.5%+5)	
Display Count		4000	
Auto Range		✓	

GENERAL CHARACTERISTICS

Power	100-240VAC, 45-440Hz
Display	5.7 Inches 64K Color TFT LCD, (320×240)
Product Color	White and Gray
Product Net Weight	3.8Kg
Product Size	330mm×165mm×165mm
Standard Accessories	Probe×4(1×, 10×switchable), Current-to-Voltage Converter Module, Test Leads, Power Cord, USB cable, PC Software CD
Standard Individual Packing	Gift Box, English Manual
Standard Quantity Per Carton	2 PCs
Standard Carton Measurement	540mm×425mm×325mm(0.075 CBM Per Standard Carton)
Standard Carton Gross Weight	13.7 Kg