

### Non-contact infrared thermometer featuring simple, one-touch measurement



Choose according to your measurement location.


### Two Models

<b>FT3700-20</b>
Distance : Spot
<b>12 : 1</b>
<b>Long-focus</b>
For measuring temperature over a wide area

<b>FT3701-20</b>
Distance : Spot
<b>30 : 1</b>
<b>Long-focus, Precise-field</b>
For measuring temperature at a single point

Identify the measurement location reliably.

### Two-point laser marker

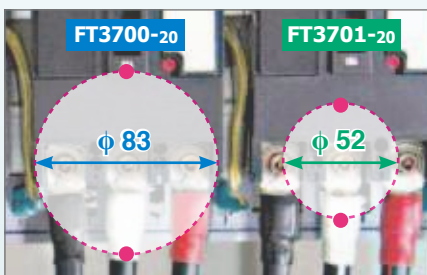

Measure the average temperature inside a circle whose diameter is defined by the two indicated points.


Example of a circuit-breaker (At a distance of approx. 1 m)



Bright



# Easily measure temperature in hazardous or unreachable locations

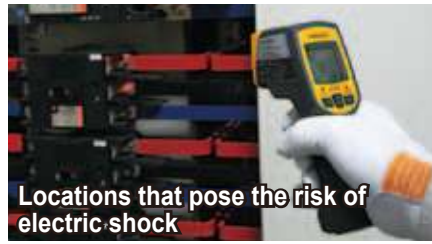

## Useful Functions

- MAX, MIN, DIF (MAX-MIN), AVG measurement
- Alarm function
- Emissivity ( $\epsilon$ ) can be set based on the measurement target
- Continuous measurement
- Backlight



## Specifications

(Accuracy guaranteed for 1 year)

	FT3700-20	FT3701-20
Measurement temperature range	-60.0 to 550.0 °C (-76 to 1022 °F) Guaranteed accuracy range is -35 to 500°C. (-31.0 to 932.0 °F)	-60.0 to 760.0 °C (-76 to 1400 °F) Guaranteed accuracy range is -35 to 500°C. (-31.0 to 932.0 °F)
Accuracy	0.0 to 100.0 °C (-32.0 to 212.0 °F) : $\pm 2$ °C 100.1 to 500.0 °C (212.1 to 932.0 °F) : $\pm 2\%$ rdg. -35.0 to -0.1 °C (-31.0 to 31.9 °F) : $\pm 10\%$ rdg. $\pm 2$ °C -60.0 to -35.1 °C (-76.0 to -31.1 °F) : Accuracy not specified 500.1 to 550.0 °C (932.0 to 1022 °F) (FT3700-20) 500.1 to 760.0 °C (932.0 to 1400 °F) (FT3701-20) : Accuracy not specified	
Accuracy guarantee for temperature and humidity	23 °C $\pm 3$ °C (73 °F $\pm 5$ °F) 80% RH or less (non-condensating)	
Temperature coefficient	Measurement accuracy $\times 0.1 / ^\circ\text{C}$	
Diameter of field of measurement	83 mm at 1000 mm (Distance : Spot = 12 : 1)	100 mm at 3000 mm (Distance : Spot = 30 : 1)
Response time	1 second (90%)	
Detection element	Thermopile	
Sighting	Two-point laser marker max 1mW (class 2), Red	
Measurement wavelength	8 to 14 $\mu\text{m}$ [Thermal emissivity compensation]0.10 to 1.00 by steps of 0.01	
Functions	MAX/ MIN/ DIF (MAX-MIN)/ AVG measurement, Alarm function, Backlight function	
Operating temperature and humidity	0 to 50 °C (32 °F to 122 °F), 80%RH or less (non-condensating)	
Storage temperature and humidity	-10 to 50 °C (14 °F to 122 °F), 80%RH or less (non-condensating) 50 to 60 °C (122 °F to 140 °F), 70%RH or less (non-condensating)	
Applicable standards	EMC : EN61326 Laser : IEC60825-1 CLASS 2 LASER	
Power supply	LR03 alkaline battery $\times 2$ , 150mVA [Continuous operating time: Approx. 140 hours] (When laser marker and backlight are OFF)	
Dimensions	Approx. 48 W $\times$ 172 H $\times$ 119 D mm (1.89" W $\times$ 6.77" H $\times$ 4.69" D) (excluding projections)	
Mass	Approx. 256 g (9.0 oz.) (including LR03 alkaline battery $\times 2$ )	
Accessories	Instruction manual $\times 1$ , LR03 alkaline battery $\times 2$ (supplied with this product for initial use only), Carrying case $\times 1$	

## Measurement focus

D : Distance (mm) S : Spot (mm)

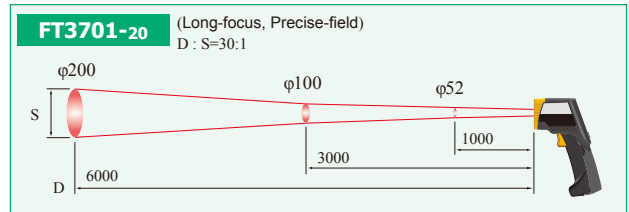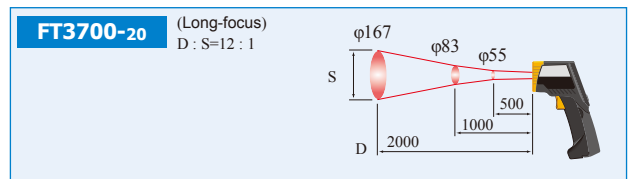

## Model : INFRARED THERMOMETER

Model No. (Order Code) (Note)

FT3700-20 (Long-focus type)

FT3701-20 (Long focus, precise-field type)

Accessories: Instruction manual  $\times 1$ , LR03 alkaline battery  $\times 2$ , Carrying case  $\times 1$



Carrying case



## Laser Product Caution Notice

A caution label is attached to the thermometer. Be sure to observe the operating precautions on the label.

## Contact infrared thermometer

### Supports temperature management needs of various applications

- Compact and weighing only 160g
- More than 200 hours of continuous operation on a single battery
- An assortment of 9 optional temperature sensors



TEMPERATURE HiTESTER 3441  
(Economically priced)

TEMPERATURE HiTESTER 3442  
(Waterproof design)

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

# HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi  
Ueda, Nagano 386-1192 Japan  
www.hioki.com

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108  
hioki@hiokiusa.com / www.hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.  
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360  
info@hioki.com.cn / www.hioki.cn

DISTRIBUTED BY

HIOKI SINGAPORE PTE. LTD.  
TEL +65-6634-7677 FAX +65-6634-7477  
info-sg@hioki.com.sg / www.hioki.com.sg

HIOKI KOREA CO., LTD.  
TEL +82-2-2183-8847 FAX +82-2-2183-3360  
info-kr@hioki.co.jp / www.hiokikorea.com

HIOKI EUROPE GmbH  
TEL +49-6173-31856-0 FAX +49-6173-31856-25  
hioki@hioki.eu / www.hioki.com