



PE-MT57 40000 counts Extra-safety intelligent multimeter

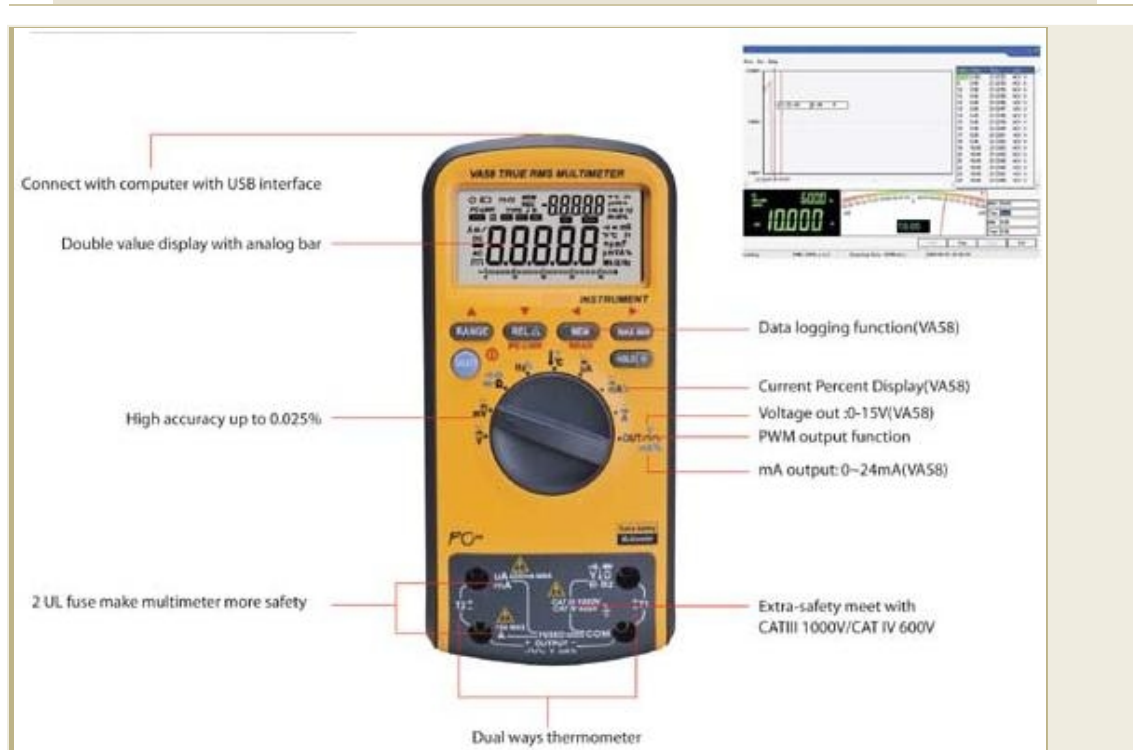

Key Features:

- Display: 40000 counts
- Double value Display+Analog Bar Display
- USB port connect to PC
- True RMS Measurement
- Relative measurement
- Auto power off
- Data hold
- Back light
- Misplug alarm
- Auto/manual range
- Low power indication
- Diode/Continuity test

This instrument complies with IEC 61010-1 : 2001, **CAT III 1000V** and **CAT VI 600V** overvoltage standards. See Specifications.

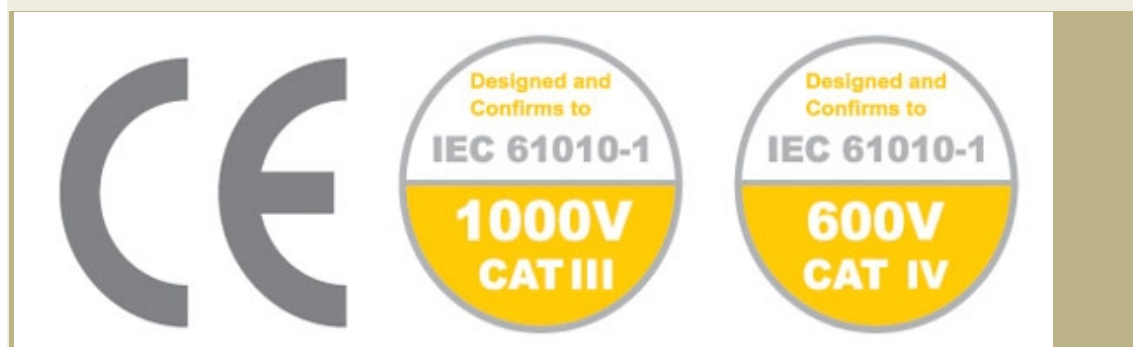

SPECIFICATIONS

Basic Functions	Range	Accuracy
DC Voltage	400mV/4V/40V/400V/1000V	$\pm(0.05\%+5)$
AC Voltage	400mV/4V/40V/400V/1000V	$\pm(0.5\%+30)$
DC Current	400uA/4000uA/40mA/400mA/10A	$\pm(0.2\%+20)$
AC Current	400uA/4000uA/40mA/400mA/10A	$\pm(1.0\%+35)$
Resistance	400 /4K /40K /400K /4M /40M	$\pm(0.5\%+10)$
Capacitance	40nF/ 400nF/4uF/40uF/400uF/4mF/40mF/1000uF	$\pm(1.5\%+20)$
Frequency	40Hz/400Hz/4KHz/40KHz/400KHz/4MHz/10MHz	$\pm(0.05\%+10)$
Duty Cycle	10%~90%	
Temperature1	-40°C~-1000°C/-40°F~1832°F	$\pm(1.0\%+30)$
PWM output	0~10KHz	$\pm(0.1\%+4)$
Temperature2	-200°C~-100°C -100°C~1300°C	$\pm(1\%+10)$ $\pm(0.5\%+10)$

General Characteristics

Power : 6F22(9V) x1

Product Size: 190(L)x90(W)x40(H) mm

Weight: 500g. Approx. (battery included)

Standard Individual Packing: Gift Box

Standard Accessories: